

# T8 LED Bypass

## HD-T8BPSP (Selectable CCT)



5-year limited warranty

Operating temperature range -20°C ~ +45°C

4 ft, G13



8 ft, Fa8  
Fa8 default (Switchable Socket R17d supplied)



### Features & Benefits

DLC, cUL listed

PET film, ShatterProtect<sup>1</sup>, 120-347V

External ballast not required, use existing lamp holders (non-shunted / shunted)

Double-ended installation

Our safety features allow for installation as well as misapplication protection<sup>2</sup>


High CRI (82+), beam angle 180°, 50000 hours life (L70)

NSF/ANSI 2 certified<sup>3</sup>

<sup>1</sup> ShatterProtect utilizes PET film to reduce the unexpected risk of shattering <sup>3</sup>Need to work with NSF certified lighting fixtures.

<sup>2</sup>Contact your local Turolight representative for detail

### Dimensional Drawing

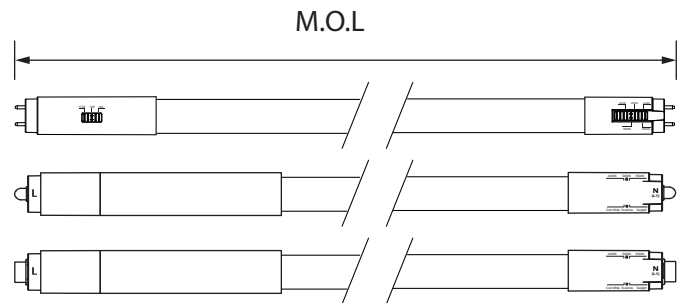

### Ordering Information Example: HD-T8BPSP/8F/38W/3CCT/F/DE/120-347V

| Family Name | Lamp Type                           | Base          | Wattage                 | CCT                    | Frost     | Installation      | Voltage  |
|-------------|-------------------------------------|---------------|-------------------------|------------------------|-----------|-------------------|----------|
| HD          | T8BPSP (T8 Bypass, shatter protect) | Blank (G13)   | MW (Selectable Wattage) | 5CCT (30-35-40-50-65K) | F (Frost) | DE (Double-ended) | 120-347V |
|             |                                     | 8F (Fa8-R17d) | 38W                     | 3CCT (40-50-65K)       |           |                   |          |

### Product Specification

| Ordering Code | DLC | Model Number                               | Wattage (W) | Voltage (V) | Initial Lumens(lm) | Base     | Hour Rating | Beam Angle | CCT(K)         | CRI | M.O.L. (inch) | Case QTY. |
|---------------|-----|--------------------------------------------|-------------|-------------|--------------------|----------|-------------|------------|----------------|-----|---------------|-----------|
| 1759000       | Yes | HD-T8BPSP/MW/5CCT/F/DE/120-347V (4FT)      | 11.5-14-16  | 120-347     | 1800-2200-2400     | G13      | 50,000      | 180°       | 30-35-40-50-65 | 82  | 48            | 25        |
| 1755002       | Yes | HD-T8BPSP/8F/38W/3CCT/F/DE/120-347V (8FT)* | 38          | 120-347     | 5500               | Fa8-R17d | 50,000      | 160°       | 40-50-65       | 83  | 96            | 10        |

\* Switchable socket G13+Fa8&R17D with the default socket **Fa8**, DLC-S is only applicable to the Fa8 socket

