

## SPECIFICATION

**NEXLEDS®**  
NEXLEDS LTD



Wet  
Location



Intertek  
5002143



**VIDEO**



**SMART**

**FLOOD LIGHT**

3000K-5700K +RGB



**Smart Flood Light**

**NXSFR-15W / NXSFR-50W**

### Specification

|                      |                                                        |
|----------------------|--------------------------------------------------------|
| PRODUCT NAME :       | Smart Flood Light                                      |
| MODEL NO. :          | NXSFR-15W-K / NXSFR-15W-Y<br>NXSFR-50W-K / NXSFR-50W-Y |
| SPECIFICATION :      | AC100-277V ; 50/60Hz; 15W / 50W                        |
| WORKING TEMP :       | -20-50(°C)                                             |
| POWER FACTOR :       | >0.9                                                   |
| CRI(RA) :            | >80                                                    |
| COLOR :              | Brown Color                                            |
| MATERIAL :           | High thermal conductivity aluminum alloy + Clear lens  |
| LIGHT SOURCE :       | SMD3030+SMD5050                                        |
| LUMEN :              | 1350-1500lm                                            |
| LIFE TIME :          | 30000 hrs                                              |
| BEAM ANGLE :         | 90X120°                                                |
| PRODUCT SIZE :       | 4.72*3.74*1.69 inch / 8.66*6.06*2.2 inch               |
| IP :                 | IP65                                                   |
| APPLICATION :        | Home, Outdoor garden , Yard,                           |
| WARRANTY :           | 5 years                                                |
| STANDARD :           | ETL                                                    |
| COLOR TEMP :         | 3000K~5700K+RGB                                        |
| INSTALLATION METHOD: | Knuckle / Bracket                                      |



www.nexleds.ca




Email: sales@nexleds.ca

**NEXLEDS®**

## Feature:

1. LED classic induction lighting function.
2. Color temperature: (3000K- -5700K)+RGB.
3. Life time: more than 30000H.
4. Contains no mercury.
5. Working environment: Dry Location, Damp Location, wet location.


## Dimension:

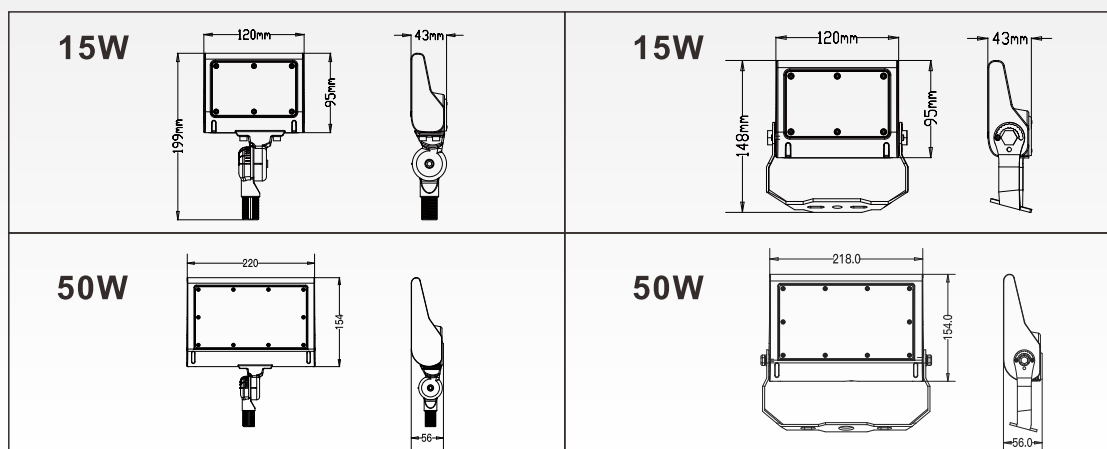

## Instruction:


### Knuckle Installation

Take out the lamp, disconnect the power supply, pass the power cord through the junction box and fix the junction box on the wall. Fix the lamp power cord through the base and fix it with a nut. Put the black wire, white wire and yellow rolling green wire passing the gasket respectively and connect the L N G line corresponding.

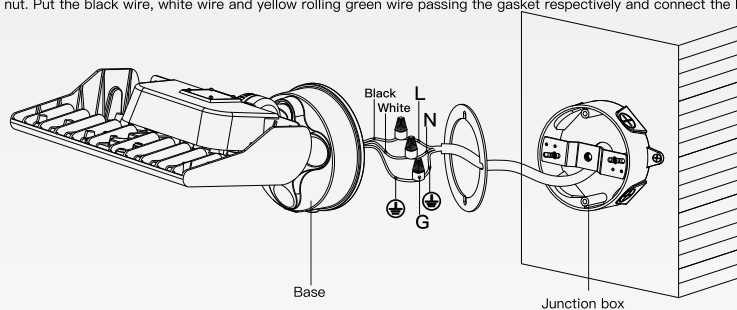

### Bracket Installation

1. Take out the light from package, adjust the bracket and make the wire go through the hole on the bracket.



2. Disconnect the power supply, drill two holes in the wall and screws into the wall. After the power cord penetrates into the wall, the bracket is aligned with the hole of the wall and then locked into the screw to fix it on the wall. Connect the black line, white line, yellow rolling green line with L N G line corresponding.

