

DESCRIPTION

- TYPE: Illuminated Mirror
- SHAPE: Arch
- Dimmable with any standard MLV / TRIAC dimmer wall switch
- CRI 90+
- IP Rating: 44
- 120V wiring
- Approx. 120,000 Hours Lifetime
- Complete UL and cUL Certification
- Hangs horizontally or vertically

AVAILABLE COLOR MODELS (Kelvin)

- Simple White: 3000K (30K) or 6000K (60K)
- 3CCT Selectable: 3000K, 4000K, 6000K (3CCT-TS)
- RGBW: Red, green, blue and white (RGBW)



MODELS AND SPECIFICATIONS

MODELS	PRODUCT NUMBERS	DIMENSIONS	LUMENS	WATTS	WEIGHT
Chic Arch 24 X 36	LCMIR-CHIC-RE-2436-XX*-Y*	24"W x 36"H x 2.2"D	3952lm	40W	25lbs
Chic Arch 28 X 48	LCMIR-CHIC-RE-2848-XX*-Y*	28"W x 48"H x 2.2"D	5328lm	53W	37lbs

XX* in the code indicates the frame color and can be replaced with **BK** for black or **GD** for gold.

Y* in the code indicates the color model and can be replaced with **30K**, **60K**, **3CCT-TS**, or **RGBW**.



COLOR RENDERING INDEX

The color rendering index (CRI) of a light source is a quantitative measure of its ability to reproduce the colors of various objects faithfully in comparison with an ideal or natural light source.

In general terms, CRI is a measure of a light source's ability to show object colors "realistically" or "naturally".


We only use LED CRI 90+.

WHITE COLOR TEMPERATURE


6000K: Pure white color light. It is the most popular color for makeup application and hairstyling.

In addition, the 6000K is 15% brighter than the 3000K light color. 85% of our customers choose the 6000K light color.


3000K: Warm white color light, the light is a little yellow.

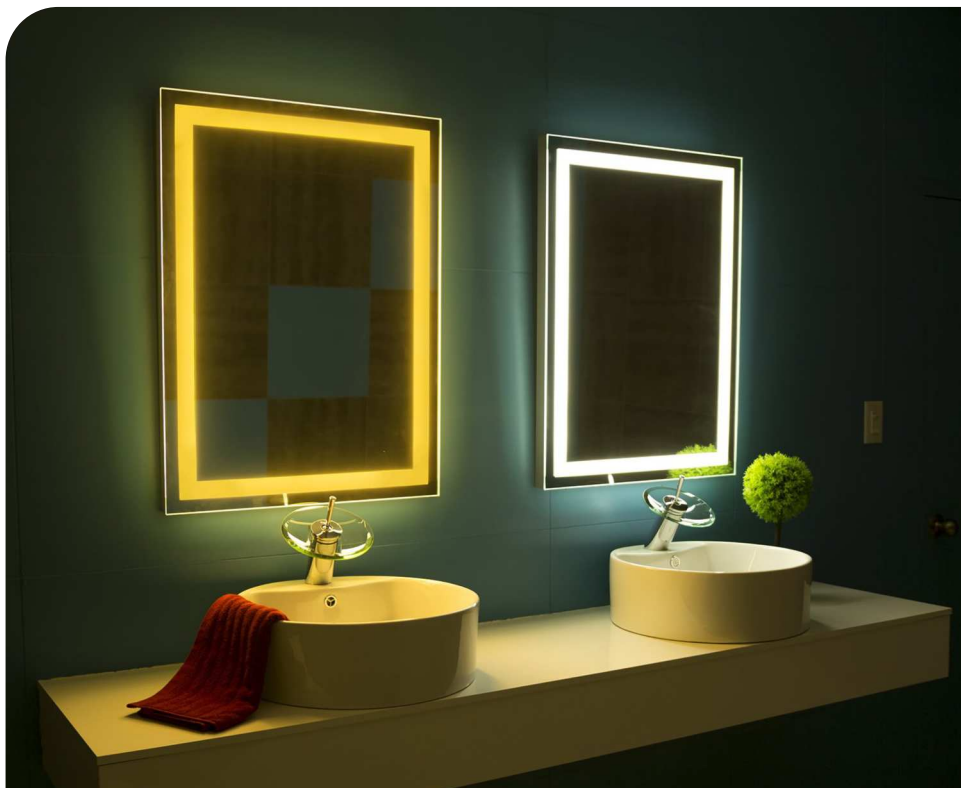


CHIC ARCH 24 X 36

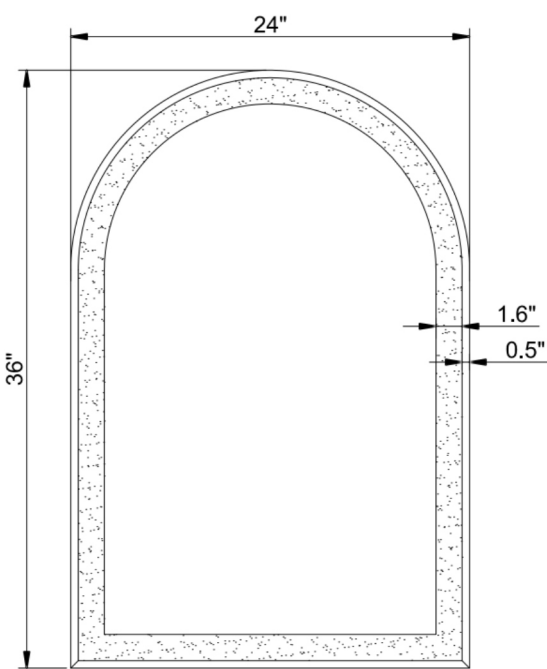

FRONT VIEW

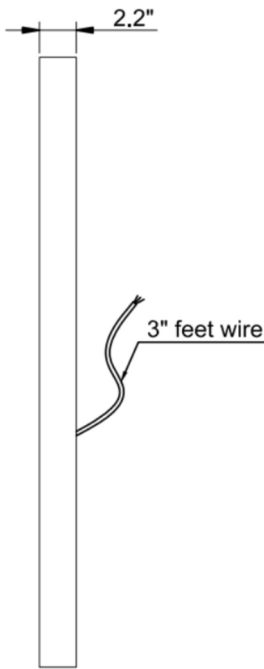


LEFT VIEW

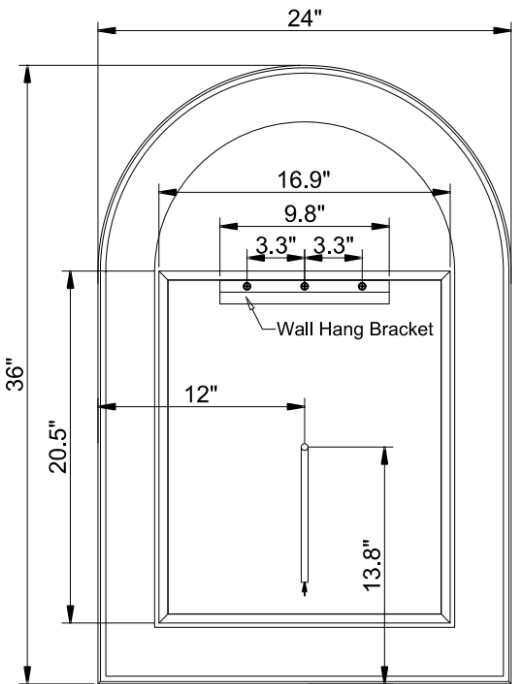


REAR VIEW


CHIC ARCH 28 X 48

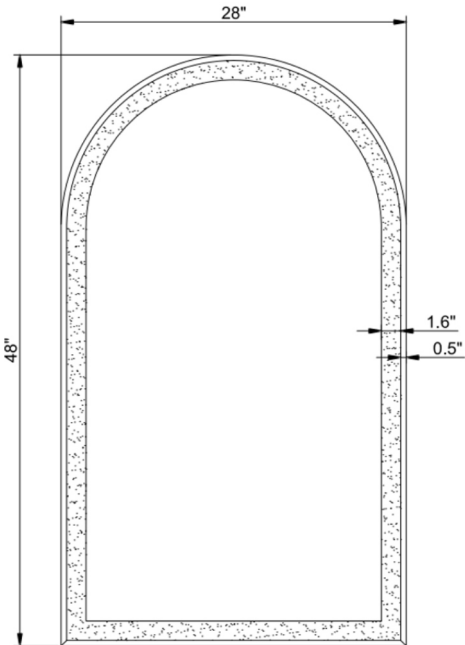

FRONT VIEW

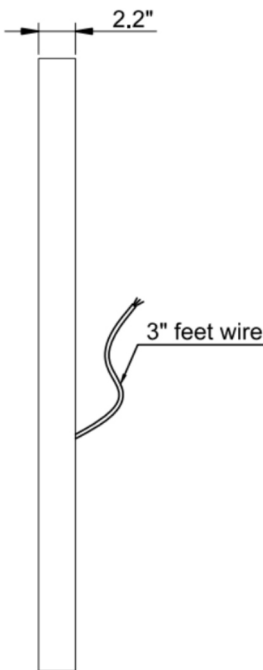

LEFT VIEW

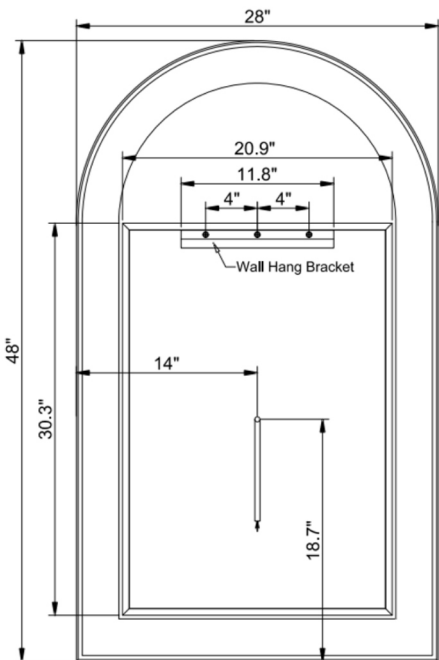

REAR VIEW

INSTALLATION & AFTER CARE INSTRUCTIONS

Installation:


- All our LED mirrors have been independently tested for compliance with electrical equipment (safety) regulations.
- All illuminated and backlit mirrors are IP44 rated.
- Illuminated mirrors have been designed and independently tested for compliance to electrical equipment (safety) regulations, and are UL Certified.
- LEDs have a life expectancy of 120,000 hours of continuous use. All LED light fittings are replaceable and are available through our customer service.
- IMPORTANT: Always switch off the electrical supply at the mains during installation and maintenance.
- It is recommended that fuse is withdrawn or circuit breaker switched off before installation begins.
- Fitting in Bathrooms is subject to all regulations. It is not suitable for product installations in Saunas, Steam Rooms, or shower cubicles and it is recommended for permanent installation.

Care Safety:

- Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes.
- Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to wall before marking out fixing holes will stop drill from moving.

Cleaning & Maintenance:

- It is recommended that the unit is cleaned with a soft, dry, non-abrasive cloth when turned off.
- Never use cleaning agents or abrasive material on any type of surface finish.
- Do not strike glass components with hard or pointed items.
- Do not place very hot or cold items against or close proximity to glass surfaces.

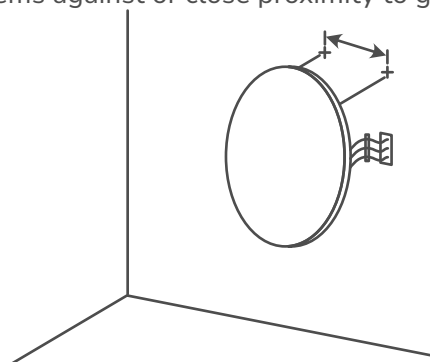

120V DIMMABLE LED DRIVER INCLUDED

- 1-Decide on wall positional placement.
- 2-Prepare & install wall hooks measured to distance between mirror's
- 3-Match & attach 3 electrical wires from mirror to home electrical wires: Live to Live, Ground to Ground, Neutral to Neutral.
- 4-Hang and affix to wall.