


DESCRIPTION

- TYPE: Illuminated Mirror
- SHAPE: Rectangle
- Dimmable using touch button
- Anti-fog
- CRI 90+
- IP Rating: 44
- 110V hard-wired electrical connection
- Entire assembly meets ETL Canada & US standards
- Vertical and horizontal mount
- 1 year warranty

AVAILABLE COLOR MODELS (Kelvin)

3-in-1 adjustable color modes:

3000K, 4000K, 6000K (3CCT-TS)

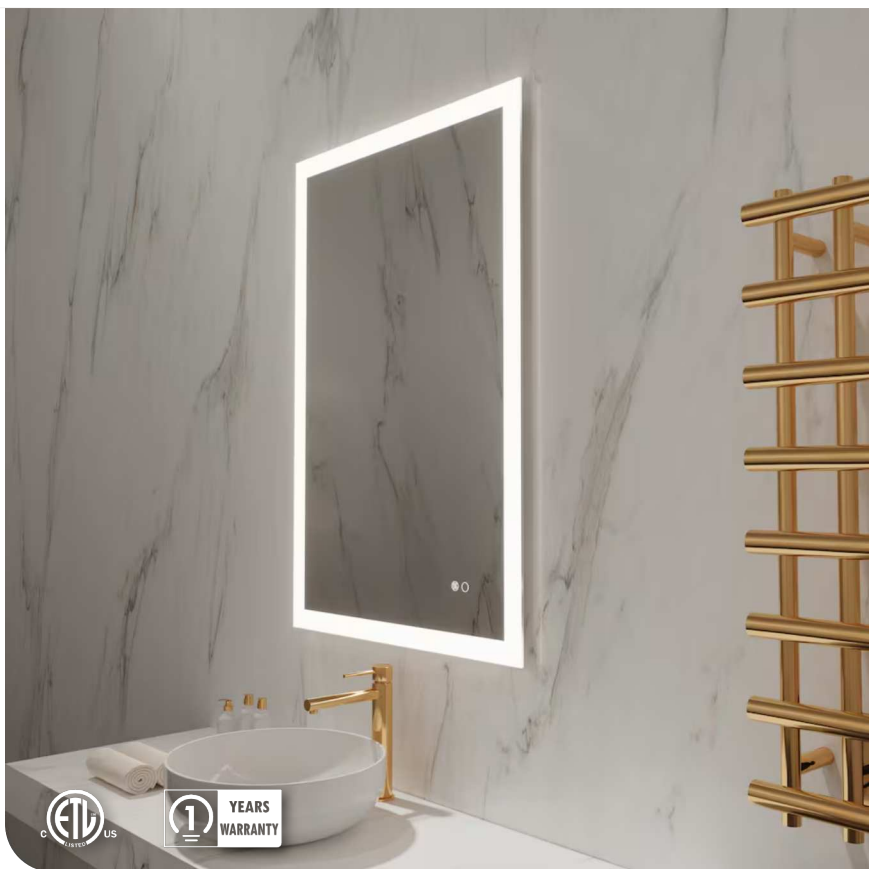

MODELS AND SPECIFICATIONS

MODELS	PRODUCT NUMBERS	DIMENSIONS	LUMENS	WATTS	WEIGHT
Koss 24 X 36	LCMIR-KOS-2436-3CCT-TS	24"W x 36"H x 1 5/8"D	2448lm	60W	19lbs
Koss 40 X 36	LCMIR-KOS-4036-3CCT-TS	40"W x 36"H x 1 5/8"D	3264lm	69W	31lbs
Koss 48 X 36	LCMIR-KOS-4836-3CCT-TS	48"W x 36"H x 1 5/8"D	3648lm	73W	37lbs
Koss 60 X 36	LCMIR-KOS-6036-3CCT-TS	60"W x 36"H x 1 5/8"D	4224lm	102W	47lbs

HOW TO USE THE TOUCH BUTTONS



Left Touch Button – Anti-fog


- Tap the touch button to turn the anti-fog ON and OFF.
The mirror is equipped with a safety feature that automatically shut offs the anti-fog after an hour.



Right Touch Button – ON/OFF, Color Change & Dimming


- Tap the touch button to turn the light ON and OFF.
- Quick-double-tap to change the light temperature from 3000K to 4000K to 6000K.
- Press and hold the sensor button to dim the light.
The mirror is equipped with a memory feature to preserve the previous brightness setting.

KOSS 24 X 36

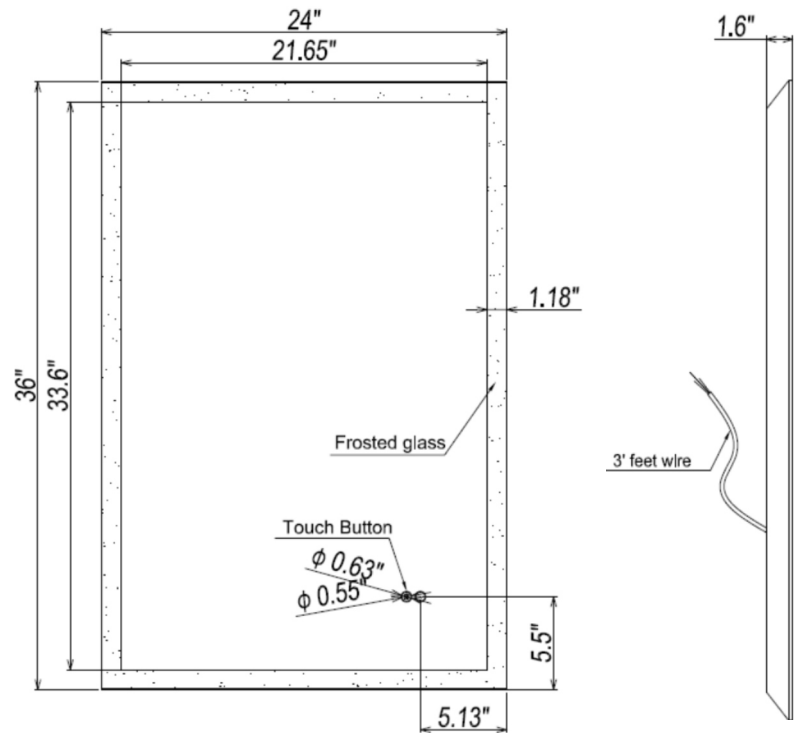


FRONT VIEW

LEFT VIEW

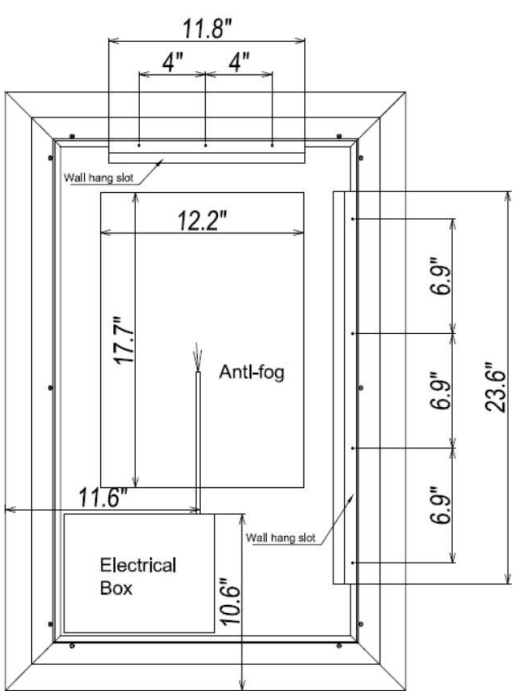


REAR VIEW

KOSS 40 X 36

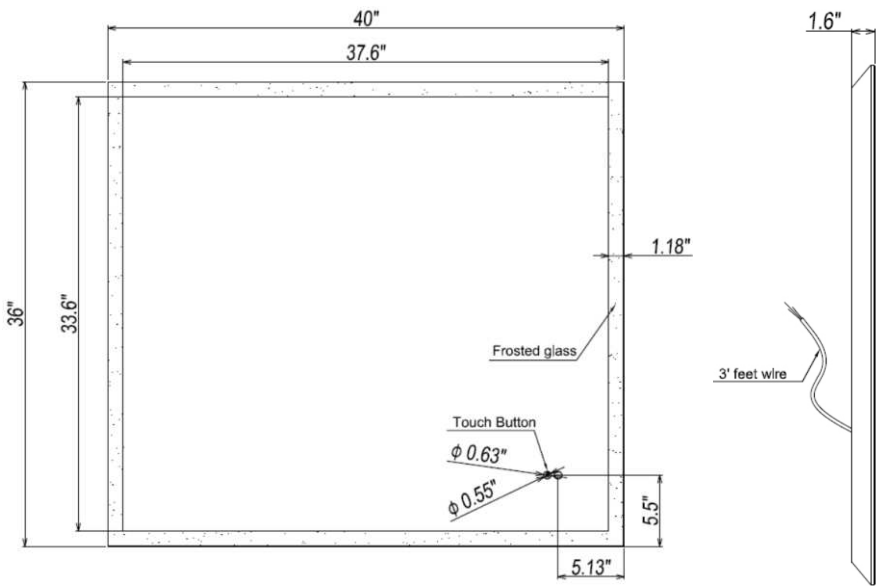


FRONT VIEW

LEFT VIEW

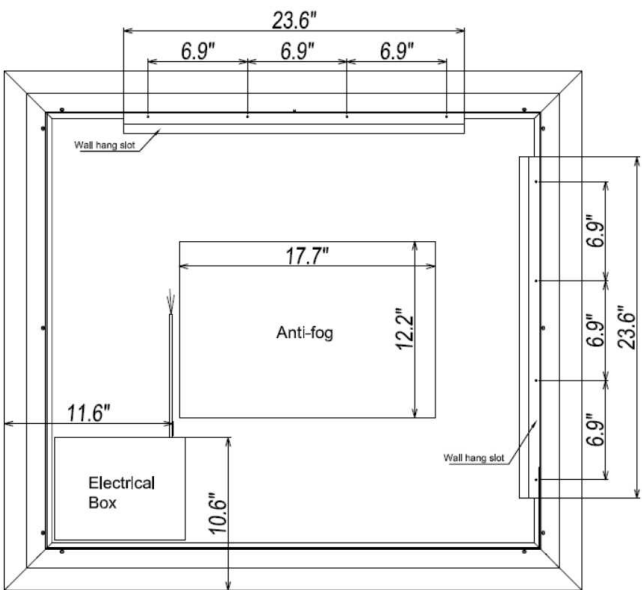


REAR VIEW


KOSS 48 X 36

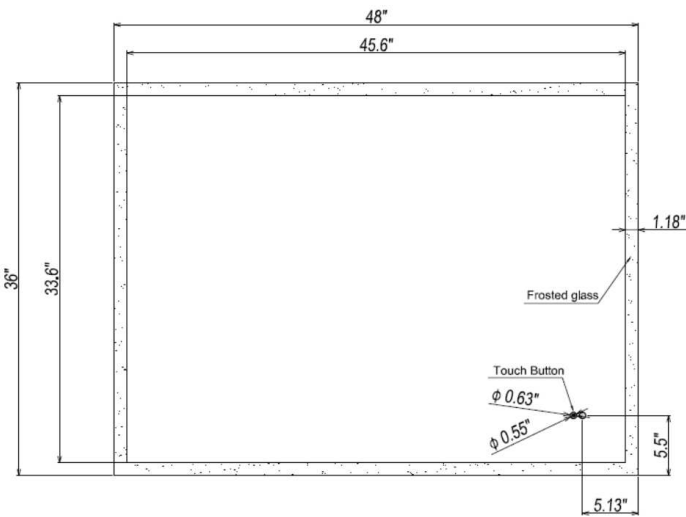

FRONT VIEW

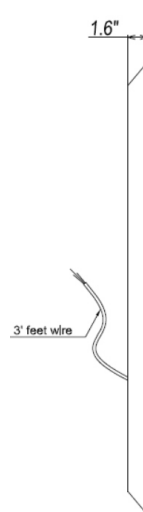


LEFT VIEW

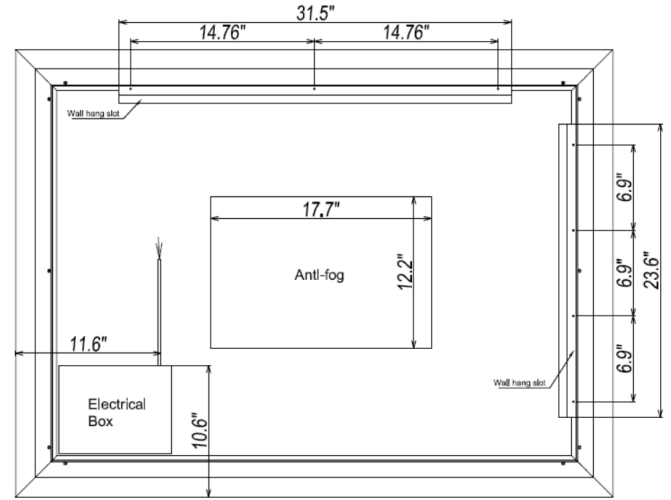


REAR VIEW


KOSS 60 X 36

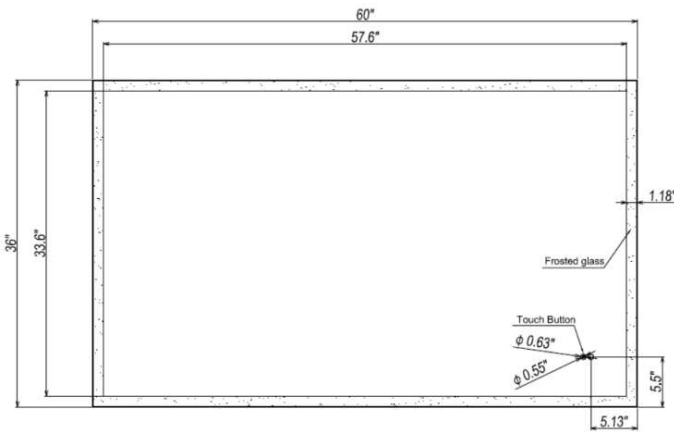

FRONT VIEW

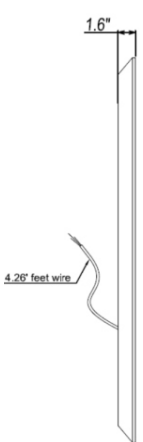

LEFT VIEW

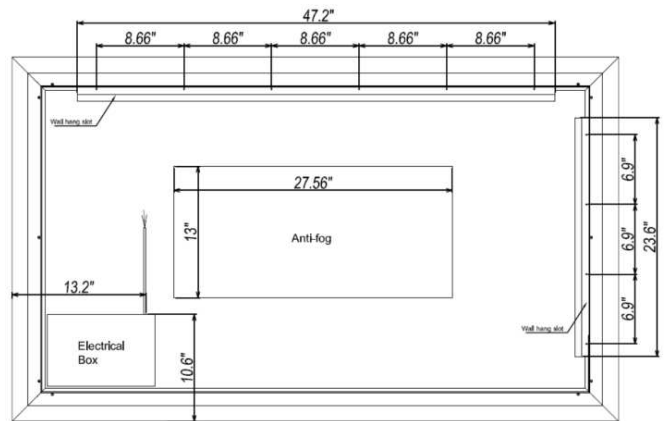

REAR VIEW

INSTALLATION & AFTER CARE INSTRUCTIONS

Electrical and Safety Specifications:

- 110V hard-wired electrical connection.
- Mirror can be turned ON/OFF and dimmed using the integrated touch button.
- All front-lit and backlit mirrors have been independently tested for compliance with electrical equipment (safety) regulations.
- All front-lit and backlit mirrors are IP44 rated.
- Illuminated mirrors have been designed and independently tested for compliance to electrical equipment (safety) regulations, and are ETL Canada & US Certified.
- LEDs have a life expectancy of 120,000 hours of continuous use.

Installation

- Decide on wall positional placement.
- Prepare & install wall hooks measured to distance between mirror's anchors.
- Match & attach 3 electrical wires from mirror to home electrical wires:
Live to Live, Ground to Ground, Neutral to Neutral.
- Hang and affix to wall.

IMPORTANT: Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that fuse is withdrawn or circuit breaker switched off before installation begins. Fitting in Bathrooms is subject to all regulations. It is not suitable for product installations in saunas, steam rooms, or shower cubicles, and it is recommended for permanent installation.

Care & Safety:

- Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes.
- Be cautious if drilling on tiled surfaces in case the drill slips. Applying a piece of masking tape on the wall before marking out fixing holes can help stopping the drill from moving.

Cleaning & Maintenance:

- It is recommended that the unit is cleaned with a soft, dry, non-abrasive cloth when turned off.
- Never use cleaning agents or abrasive material on any type of surface finish.
- Do not strike glass components with hard or pointy items.
- Do not place very hot or cold items against or in close proximity to glass surfaces.