




DIMENSIONAL DRAWING

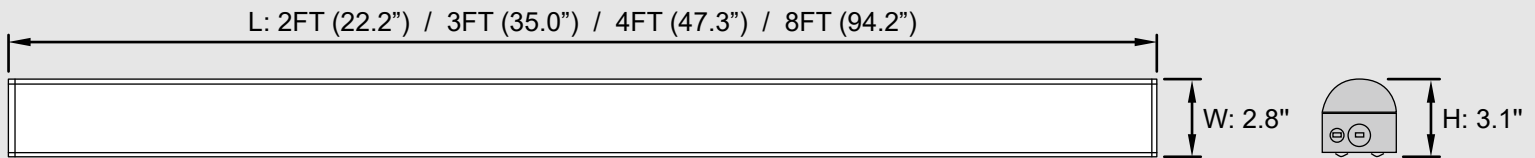

FEATURES

- White post painted steel housing in: 2', 3', 4' and 8' lengths.
- Operating temperature range of $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$.
- Field Selectable 5 CCT (3000K, 3500K, 4000K, 5000K & 6500K) along with Auto Sensing 120- 347V Driver.
- PMMA opal lens and optional field installed wire guard for additional protection.
- Suitable for Surface, or suspended chain mounting. J-BOX split cover plate (included) and row mounting possible with optional joiner plate.
- Compatible with 0-10V Dimming, cULus Listed.
- Usable in damp location.

SPECIFICATIONS

Housing :

White post painted steel housing with split LED box cover.

Optics :

PMMA opal lens mounted on LED Box cover snaps onto housing.

Mounting :

Suitable for surface or suspended mounting with standard snap on mounting brackets. Row mounting possible with optional row mount joiner plate.

Driver :

Autosensing 120-347V, selectable wattage with Operating temperature range of $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$.

LED :

Field Selectable CCT of 3000K, 3500K, 4000K, 5000K & 6500K.

Controls :

Compatible with optional microwave sensor controlled via optional Remote Control.

PRODUCT SPECIFICATIONS

Product code	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (Kelvin)	CRI
LCWRAP-20W-MW-5CCT-UV-T-2FT	16-18-20	120-347V	100,000	120°	2080-2340-2600	30-35-40-50-65	>80
LCWRAP-25W-MW-5CCT-UV-T-3FT	17-21-25	120-347V	100,000	120°	2210-2730-3250	30-35-40-50-65	>80
LCWRAP-45W-MW-5CCT-UV-T-4FT	34-38-45	120-347V	100,000	120°	4420-4940-6075	30-35-40-50-65	>80
LCWRAP-90W-MW-5CCT-UV-T-8FT	65-75-90	120-347V	100,000	120°	8450-9750-11700	30-35-40-50-65	>80

POLAR CANDELA

