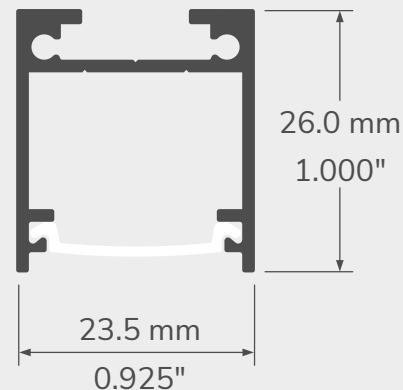




PERFECT FOR INDOOR OR OUTDOOR USE




This profile is the biggest in size from our 100 series line of product. It has been specially designed for outdoor use and can house all the different IP68 lumen Packages we offer. With a new sliding lens design, this profile offers a wide variety of installation, from fixed to suspended mounting.

TECHNICAL DRAWING



FEATURES

- The support rail offers a large range of installation and assembly both fixed and suspended.
- NEWslidable lens system.
- Designed to give a uniform light without hot spots with a prime lens.
- Custom length by sections of 2 to 240 inches (6m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.

PROFILES	LENSES	MOUNTING HARDWARE	SUSPENSION / RECESS	REFLECTOR	LENGTH
 145 - Series alu  145BK - black  145WH - white  145CS - custom color	 PR - Prime lens  OP - Opal lens  BK - Black lens  FO - Focus lens  PR3D- Square 3D, Prime	 SW- Swivel bracket 180°   HDSW-Heavy duty swivel bracket  PH- Phantom bracket  MG- Magnetic kit  WSB- Surface 2-side bracket  SWS- Surface 1-side bracket  AWS- Surface 90° bracket  W45- Surface 45° bracket  SUS- 1400 suspension kit	NOTE: Canopies only available with SUS bracket (suspension)  Remotedriver canopy plate See Appendix 2 on page 266 CR0- Alu CR1- Black CR2- White  Integrated driver in canopy See Appendix 2 on page 266 CI0- Alu CI1- Black CI2- White  Integrated driver & suspension kit See Appendix 2 on page 266 CIK0- Alu CIK1- Black CIK2- White NOTE: Can be used with PH bracket (phantom) or flat head screw  Gypsum groove 1/2", 4" See page 194 for details G1450	 HER- High efficiency reflector	Custom length by sections of 2 to 240 inches (6m).
RAL NUMBER					
 CH900-1450 corner 90°, 6x6", alu. Joiners to be ordered separately  CH901-1450 corner 90°, 6x6", black Joiners to be ordered separately  JS- Type B straight joiner					

