

LED FIXTURE

TL Series



LED Emergency Combo Sign TL-RMES302-5W

"Running Man" LED emergency combo sign



2-year limited warranty

Operating temperature range -10 °C ~ +40 °C



Features & Benefits

Metal housing c/w 36W 6V battery pack, allows for the addition of remote heads

Lead-acid battery 6V/6Ah backup for 0.5hrs

5W x 2 lamp adjustable heads

Universal (wall, ceiling, side) mounting capable


3 Pictograms included, single/ double face

Test switch and charge indicator light

CSA C22.2 No 141-15

IP20, damp location rated

Dimensional Drawing

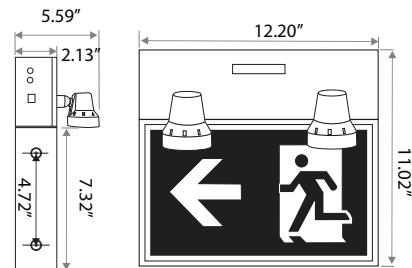

Ordering Information Example: TL-RMES302-5W

Family Name	Fixture Type	Model
TL (Turolight)	RMES ("Running Man" emergency sign)	302-5W ("Running Man" combo sign, metal, additional 6VDC remote head capable, self powered, 5W x 2 lamp adjustable heads)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	Mounting	Remote Capable	Damp Location	Dimensions LxWxH (inch)	Case QTY.
3461221	TL-RMES302-5W	Running Man LED Combo, Metal Hsg, 120/347V, 2X5W, Max: 34W - 30 Mins.	36W	120/347V	Wall	Yes	Yes	12.2\"x11.02\"x2.13\"	6

Emergency Runtime Charts

Emergency Run Time in Minutes	Wattage	No of additional Heads	
		2W	5W
30	36	11	4
60	25	6	2
90	18	3	1
120	12	-	-

* Actual wattage loads may be affected by length and gauge of the wire runs used to connect the remote heads.

* It is recommended to load battery pack 20% under their maximum load.



Arrow 2pcs



Without arrow 1pc