



FREE TO SHINE



OFF-GRID

LED SOLAR AREA LIGHT
COMPARES TO 400W HID

- Off-Grid – completely free to operate, plus no trenching or wiring required.
- New MPPT Solar Charge Controller optimizes charging under all conditions.
- All-in-one design.
- Exclusive long-lasting battery withstands extreme temperatures.
- Easy to install and operate.
- Adjustable solar panel — can be mounted up to 16 ft away from light engine.
- Custom optics and color temperatures available.
- LED Operating Temperature Range = -40F to 140F
Battery Operating Temperature = -4F to 140F



PART #	UPC	COMPARABLE TO	LUMENS	CCT	EPA
SL-SAL-OG-50W-50K-SF-BK-G2	844006081423	400W	9800	5000K	6.1

BRACKET & ADDITIONAL SOLAR PANEL (MUST ORDER SL-SAL-50W-2PANELKIT - SHIPS IN SEPARATE BOX)

PART #	DESCRIPTION
SL-SAL-50W-2PANELKIT	2X 50W SOLAR PANELS, 10 FOOT EXTENSION CABLE, 6 FOOT Y-CABLE, ADJUSTABLE BRACKET



solera-solar.com • 847.380.3540


LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com
05.24.23 Information is subject to change without notice.






FREE TO SHINE

Fixture Side View

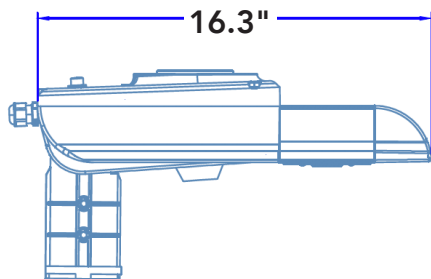


Fixture Top View

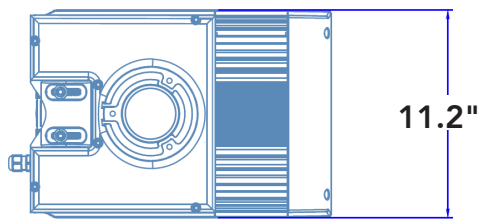

(Total fixture weight = 30lbs)

OFF-GRID

LED SOLAR AREA LIGHT
COMPARES TO 400W HID

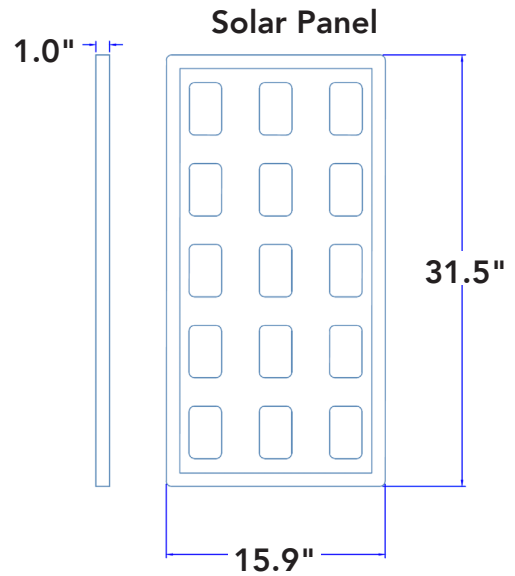

- **Default Setting - No Adjustments Necessary**

The default setting is Dusk 'till Dawn @ 80% first 2 hours, 50% constant & 80% w/ motion for the rest of the night.